



PCT/GB 2003 / 0 0 3 7 6 1

Rec'd PCT/PTO 14 JUL 2004



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

10/501618
**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)


REC'D 30 SEP 2003
WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

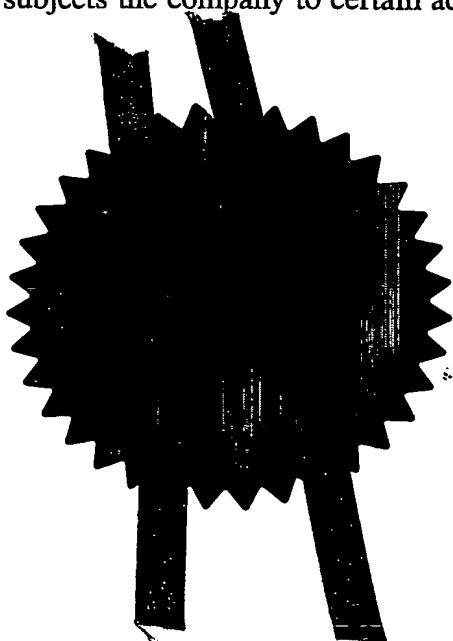

Signed


[Signature]

Dated 28 August 2003

BEST AVAILABLE COPY



03SEP02 045057-1 D02919
0220277.8 0.00-0220277.8

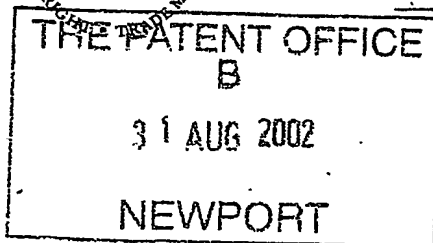

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference C854/H

2. Patent application number
0220277.8

31 AUG 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

John Herbert NORTH
21 Briar Court
Guardian Road
Norwich
NR5 8PR

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

7482763001

4. Title of the invention

Improvements in and relating to particle separation apparatus

5. Name of your agent (if you have one)

Keith W Nash & Co

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

90-92 Regent Street
Cambridge
CB2 1DP

Patents ADP number (if you know it)

1206001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

No

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d)

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 6

Claim(s)

Abstract

Drawing(s) 1 + 1 

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)


Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date 30/08/2002

Keith W Nash & Co., Agents

12. Name and daytime telephone number of person to contact in the United Kingdom

Keith Nash 01223 355477

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- 1) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- 2) Write your answers in capital letters using black ink or you may type them.
- 3) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- 4) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- 5) Once you have filled in the form you must remember to sign and date it.
- 6) For details of the fee and ways to pay please contact the Patent Office.

C854/H

Title: Improvements in and relating to particle separation apparatus

Field of the invention

This invention concerns particle separation apparatus which employs at least one cyclone to separate particles from air drawn into the apparatus by a suction device comprising an electric motor driven fan downstream of the cyclone.

Background

In such apparatus it is possible for the inlet to the cyclone (or a passage leading from one cyclone to another) to become blocked due to a build up of dust and dirt drawn into the apparatus and not separated by the cyclone action. This reduces the airflow through the cyclone and suction producing fan which becomes cumulative, since reduced airflow reduces the separation efficiency of the cyclone on other dust and dirt entering the cyclone, thereby enabling this material to exit the cyclone with the air stream instead of remaining in the dust collecting region of the apparatus.

Where the airflow is also designed to cool the electric motor driving the suction fan, the reduced airflow through the apparatus could cause the motor to overheat and even burn out.

It is an object of the present invention to provide a means by which an airflow is maintained over the fan motor even if the separation apparatus has become partially or completely blocked upstream of the fan.

Summary of the invention

According to the present invention a valve is provided, upstream of the suction fan driving motor and downstream of the cyclone separating means of a particle separation apparatus, which includes a valve closure and a valve seat against which the closure is normally resiliently urged to prevent air flowing through the valve, and the valve is mounted so as to communicate with a passage between the cyclone and the fan so that air pressure within the passage acts on one side of the closure while the other side of the closure is exposed to ambient air pressure, whereby in use if the air pressure in the passage leading from the cyclone to the fan falls sufficiently below ambient, so that the pressure differential acting on the creates a force sufficient to overcome the resilient force acting on the closure, the closure will become displaced from the seating and allow air to enter the passage to maintain an air flow over the fan motor.

Typically the closure is urged into the closed position by a resiliently deformable member acting on the one side of the closure.

Preferably the closure is located within a hollow housing and the resiliently deformable member is a spiral spring which acts between the rear surface of the closure and one end of the housing and an opening is provided in the opposite end defining the valve seating, the size of the opening being less than the size of the closure.

Preferably an elongate guide extends rearwardly from the centre of the closure and the said one end of the housing has an opening therein within which the guide is a sliding fit.

The closure may be a generally flat plate or may be shaped so as to provide a curved or conical or frusto-conical surface for contacting and sealing against the seating.

Typically the seating is a circular opening and the closure is at least hemispherical with its convex surface towards the seating and the radius of the closure is greater than the radius of the seating.

Preferably the seating includes or is formed from or coated or covered by a ring of resiliently deformable material, such as rubber, typically an O-ring seal, and the closure is adapted to make contact with the ring of deformable material so as to ensure a good airtight seal when pressed thereagainst.

Preferably the closure is a hollow sphere or ball and preferably is formed from low-density plastics material and is thin walled so as to have very low mass. In a preferred embodiment the ball includes openings in the wall of the half thereof which is remote from the half which co-operates with the annular seating, so that the pressure within the ball is always the same as the pressure within the housing.

Where the closure is a hollow ball the guide may be hollow and open at both ends to communicate between the interior of the ball and the passageway and where the wall of the latter is provided with one or more openings, ambient air released into the housing due to a pressure differential acting on the ball sufficient to unseat the ball from the seating, can pass from the housing via the ball and interior of the guide to the passage between cyclone and fan, to increase the air flow to the fan and therefore over the motor.

In addition or instead the said one end wall of the housing may be formed with one or more openings to communicate between the passage and the interior of the housing through which ambient air can pass when the valve is opened due to the occurrence of the aforementioned pressure differential.

The housing may be cylindrical and made from two cylindrical parts, which can be joined as by screw threaded engagement, one part having the opening defining the valve seating in an end thereof and its other end being open, and the other part having the opening for the guide with or without other openings to provide for airflow between the housing and the said passage and likewise being open at its other end, and the two open ends of the two parts are adapted to be joined to form the closed cylindrical housing.

Preferably the end of the housing having the opening for the guide therein is adapted to be fitted into or around a port in the wall of the said passage, so as to attach the housing to the apparatus.

In a preferred arrangement a helical spring is fitted around the elongate guide to be freely slidable relative thereto. If a pressure differential builds up across the closure to lift it off the seat, the guide slides relative to and through the said one end of the housing containing the opening therefor, and the spring becomes compressed between the ball and the said one end of the housing, the compression storing energy in the spring which creates a restoring force acting on the closure to move the latter back into sealing engagement with the seating when the pressure differential drops, such as will occur due to clearance of the blockage upstream of the passage, or after the fan motor is switched off.

The invention will now be described by way of example with reference to the accompanying drawing in which the single Figure is a side elevation in cross-section of a cyclone separator having a valve constructed as an embodiment of the invention connected thereto.

In the drawing item 10 is a detachable dust-collecting vessel and 12 is the main body of the device housing a cyclone dust/dirt separator. Air is drawn through the apparatus by a fan 14 driven by an electric motor 16 supported within a cylindrical air outlet passage 18 so that air can pass upwardly around the motor under the action of the fan 14.

Dust laden air enters the apparatus via inlet 20 which may be connected to a flexible tube leading to a rigid tube having a vacuum cleaner head at its remote end as is provided with a conventional domestic or industrial vacuum cleaner.

The cyclone separation apparatus within 10, 12 is not the subject of this Patent Application but may be constructed in accordance with what is illustrated and described in UK Patent Application Nos. 0116410.2, 0116409.4, 0116407.8 and 0116411.0.

A passage 22 extends from the output 24 of the separation apparatus 10, 12 to a housing 26 containing the fan 14 and motor 16. The wall of the passage includes an opening leading to a side tube defining a port 27 over which one end 28 of a tubular housing 30 is a tight push fit. The remainder of the housing 30 is generally cylindrical and hollow and its two ends are closed except to define a circular opening 32 carrying an O-ring defining a valve seating 34 at the outboard end, and at the other inboard end an opening for slidably receiving a radially extending elongate protrusion 36 which comprises a guide for a valve closure comprised of a hollow spherical shell 38 from which the guide 36 extends radially. The shell has openings 40, 42. The closure 38 is urged into contact with the O-ring by a helical compression spring 44 freely slidable on the guide 36 and trapped between the inboard end 46 of the housing 30 and the rear of the closure.

The spring rate of the compression spring 44 is selected so as to keep the closure in sealing engagement with the O-ring 34 unless a pressure differential occurs across the closure (caused by a blockage or partial blockage of the air path upstream of the passage 22) sufficient to compress the spring and open the valve. This can occur if for example the vacuum cleaner head is held in contact with a flat surface so that little or no air can enter it, or if a build up of dirt and dust occurs in a flexible tube leading to the inlet 20, or in the path leading to, through, or from the cyclone separator within 10, 12.

The housing 30 may be formed from two cylindrical shells 29, 31 one of which will screw threadedly engage the other as at 33.

The push fit of 28 onto 26 may be replaced by a screw-threaded engagement, or the two parts may be adhesively bonded, or may be welded.

A filter (not shown) may be provided downstream of the motor e.g. at the entrance to the housing 26 from the passage 22.

Instead of, or in addition to, the air passage provided by the openings 40, 42 and the hollow interiors of 38 and 36, between the housing 30 and the passage 22, openings such

as 48, 50 may be provided in the end wall 46 around the opening in which 36 is slidably received.

C84/14.

